

Wiper 3

Description

Monophase centrifugal pumps designed for the recirculation of pumps in swimming pools and Jacuzzis, with flows up to 55 m³/h. With adjustable impulsion and central suction.

With drainage spout on the pump casing. Supplied with suction and impulsion adaptors.

Materials

Pump casing, pump base, diffuser, impeller and seal mounting in technopolymer.

AISI 420 stainless-steel drive shaft.

Mechanical seal in graphite and alumine, L-2521 alumine motor casing and windings mechanism impregnated with epoxy resin. NBR gaskets.

Motor

Dual-pole, asynchronous. IP-55 protection. Class F insulation.


Continuous operation. Single-phase version with built-in thermal protector.

Accessories

Control panel model	Reference	P1 (kW)		Dimensions			Unitary packaging		
		1~	3~	A	B	C	m ³	Kg	u/pallet
NC CM 2	134548	2,2	-	160	190	113	0,004	2	24
NC CT 2	134549	-	2,2	160	190	113	0,004	2	24
NC CT 3	137584	-	3,0	160	190	113	0,004	2	24



Dimensions

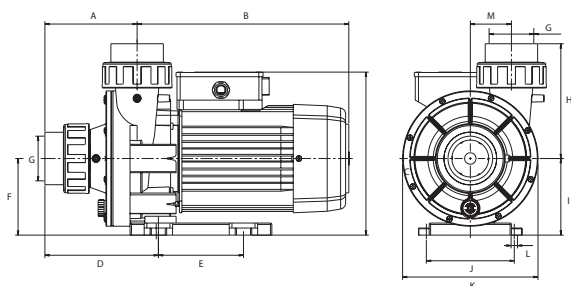

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
Wiper3 150	130	299	230	160	120	108	63	162	108	124	191	9	29
Wiper3 200	130	299	230	160	120	108	63	162	108	124	191	9	29
Wiper3 300	130	299	230	160	120	108	63	162	108	124	191	9	29

Model	Reference		I (A) 1~			I (A) 3~			P1 (kW)		P2	c	Ø Suc.	l/min	50	100	200	300	400	500	600	900	Unitary packaging		
	Single-phase	Three-phase	230 V	230 V	400 V	1~	3~	(kW)	(HP)	(µF)													(mm)	m³/h	3
Wiper3 150	97851	97848	6,4	5,0	2,9	1,4	1,4	1,1	1,5	25	63	mwc	13,3	13,0	12,1	10,8	8,2	5,0			0,048	16,2	18		
Wiper3 200	97859	97856	8,6	6,6	3,8	2,0	1,9	1,5	2,0	30	63		14,8	14,5	13,9	12,9	11,1	9,1	6,8		0,048	17,0	18		
Wiper3 300	129316	129315	11,0	7,3	4,2	2,6	2,4	2,2	3,0	60	63		14,8	14,5	14,1	13,5	12,8	11,9	10,7	4,7	0,048	18,8	18		

